



victron energy
B L U E P O W E R

Phoenix Inverter

Phoenix Inverter

SinusMax - Superior engineering

Developed for professional duty, the Phoenix range of inverters is suitable for the widest range of applications. The design criteria have been to produce a true sine wave inverter with optimised efficiency but without compromise in performance. Employing hybrid HF technology, the result is a top quality product with compact dimensions, light in weight and capable of supplying power, problem-free, to any load.

Extra start-up power

A unique feature of the SinusMax technology is very high start-up power. Conventional high frequency technology does not offer such extreme performance. Phoenix inverters, however, are well suited to power up difficult loads such as refrigeration compressors, electric motors and similar appliances.

Virtually unlimited power thanks to parallel, 3-phase and split phase operation capability

Up to 6 units Phoenix 24/3000 can operate in parallel to achieve higher power output. Six 24/3000 units, for example, will provide 15 kW / 18 kVA output power. Operation in 3-phase, split phase and 2 leg three phase configuration is also possible.

To transfer the load to another AC source: the automatic transfer switch

If an automatic transfer switch is required on models rated at 2500 VA or more, we recommend to use the Phoenix Multi instead. The switch is included in these products and the charger function of the Multi can be disabled. For our lower power models we recommend the use of our Filax Automatic Transfer Switch. Computers and other electronic equipment will continue to operate without disruption because both the Filax and the Phoenix Multi feature a very short switchover time (less than 16 milliseconds).

Computer interface


All models rated at 2500 VA or more have a RS-485 computer interface. All you need to connect to your PC is our data link MK2 (see under accessories). This data link takes care of galvanic isolation between the inverter and the computer, and converts from RS-485 to RS-232. Together with the [VEConfigure](#) software, which can be downloaded free of charge from our website www.victronenergy.com, all parameters of the inverters can be customised. This includes output voltage and frequency, over and under voltage settings and programming the relay. This relay can for example be used to signal several alarm conditions, or to start a generator.

The inverters can also be connected to [VE.Net](#), the new power control network of Victron Energy, or to other computerised monitoring and control systems.

New applications of high power inverters

The possibilities of paralleled high power inverters are truly amazing. For ideas, examples and battery capacity calculations please refer to our book "Energy Unlimited" (available free of charge from Victron Energy and downloadable from www.victronenergy.com).

Application example

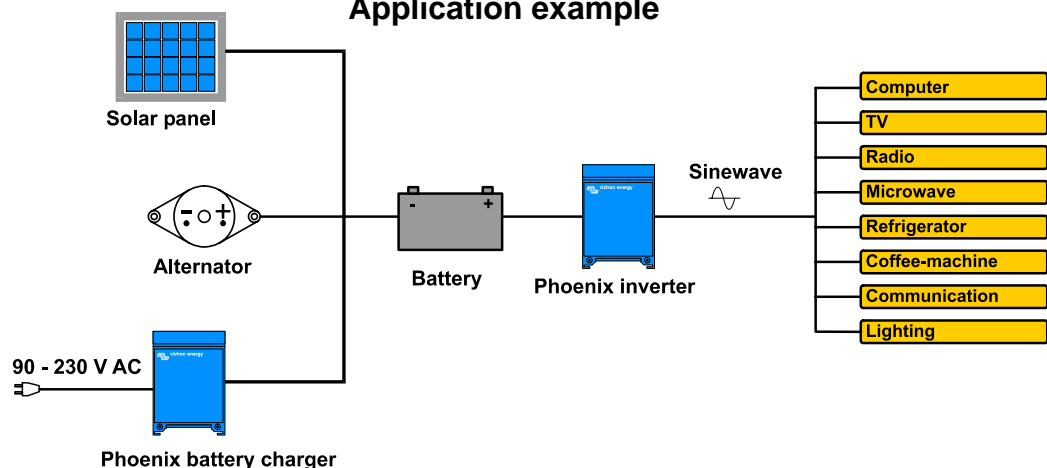




Specifications

Phoenix inverter	12 Volt 24 Volt	12/180 24/180	12/350 24/350	12/750 24/750	12/2500 (5) 24/3000 (5)
Input voltage range (V DC)		10,5 - 15,5 21,0 - 31,0	10,5 - 15,5 21,0 - 31,0	10,5 - 15,5 21,0 - 31,0	9,5 - 16,0 19,5 - 33,0
Cont. output power (VA) at 25°C (75°F) (6)		180 180	350 350	750 750	2500 3000
Cont. power (W) at 25°C / 40°C (75°F / 100°F)		175 / 150 175 / 150	300 / 250 300 / 250	700 / 650 700 / 650	2000 / 1600 2500 / 2000
Peak power (W)		200 200	500 500	1400 1400	4500 6000
Max. efficiency 12 / 24 V (%)		91 / 92	90 / 91	91 / 93	93 / 94
Zero-load power 12 / 24 V (W)		2,2 / 3,0	3,0 / 3,5	12 / 12	15 / 15
Zero-load power in AES mode		n. a.	n. a.	3 / 4	10 / 10
Multi purpose relay driver or relay (7)		n. a.	n. a.	n. a.	relay
Protection (4)		a,b,d,h	a,b,d,h	a,b,d,h	a - h
Common Characteristics (2,3)		Output: 120 V ± 2% / 60 Hz ± 0,2% Operating temperature range: 0 - 120°F (fan assisted cooling) condensing) : max 95%			Humidity (non
ENCLOSURE					
Material & Colour		aluminum (blue Ral 5012)			
Battery-connection		1)	1)	Screw conn.	M8 studs
120 V AC-connection		NEMA5-15R	NEMA5-15R	NEMA5-15R	screw-clamp AWG 6
Protection category		IP 20	IP 20	IP 20	IP 21
Weight (lbs)		5.4	7	5.4	40
Dimensions (hxxwxd in inches)		2.8x5.2x7.9	2.8x6.1x9.3	2.8x7.1x11.6	19.0x10.2x8.6
ACCESSORIES					
Remote panel (RS 485 port)					√ (PIV)
Remote on-off switch		√	√	√	√
STANDARDS					
Safety		EN 60950	EN 60950	EN 60950	EN 60335-1
Emission / Immunity		EN 50081-1, EN55014 / EN 55014-2			

- 1) Battery cables of 1.5 meter
- 2) 230 V AC on request
- 3) 50 Hz on request
- 4) Protection
 - a. Output short circuit
 - b. Overload
 - c. Battery voltage too high
 - d. Battery voltage too low
 - e. Battery reverse polarity detection
 - f. 230 V AC on inverter output
 - g. Input voltage ripple too high
 - h. Temperature too high
- 5) Suitable for parallel, 3-phase, split phase and 2 leg three phase

- 6) Non linear load, crest factor 3:1
- 7) Multipurpose relay which can be set for general alarm, DC undervoltage or genset start signal function

Five parallel units: output power 12,5 kW

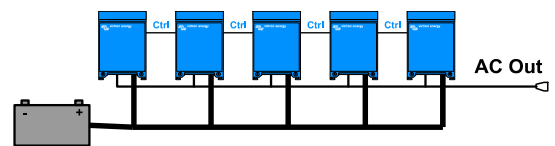

Accessories



Battery Alarm

An excessively high or low battery voltage is indicated by an audible and visual alarm, and a relay for remote signalling.



Phoenix Inverter Control (PIV)

This panel is intended for the models equipped with a RS-485 data port. It can also be used on a Phoenix Multi when an automatic transfer switch but no charger function is desired. The brightness of the LED's is automatically reduced during night time.



Computer controlled operation and monitoring (Victron Interface MK2)

All models rated at 2500 VA or more are ready to communicate with a computer through a RS-485 data port. All you need to link to your PC and be able to set and read out all parameters is the data link as shown and software available on our website.

Moreover, all Victron Energy products equipped with an RS-485 data port can easily be integrated in VENet, the new power control network of Victron Energy, or to other computerised monitoring and control systems.



BMV-501 Battery Monitor

The BMV – 501 Battery Monitor features an advanced microprocessor control system combined with high resolution measuring systems for battery voltage and charge/discharge current. Besides this, the software includes complex calculation algorithms, like Peukert's formula, to exactly determine the state of charge of the battery. The BMV – 501 selectively displays battery voltage, current, consumed Ah or time to go. The monitor also stores a host of data regarding performance and use of the battery.

Victron Energy B.V. / De Paal 35 / 1351 JG ALMERE / The Netherlands

Phone: (+31) (0)36 535 97 00 / Fax: (+31) (0)36 535 97 40 / www.victronenergy.com / e-mail: sales@victronenergy.com

