

VE-Direct Inverters – new models

250W – 1600W 120V



www.victronenergy.com



Inverter 12/375 VE.Direct



Inverter 12/375 VE.Direct

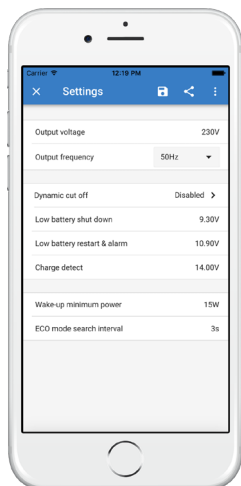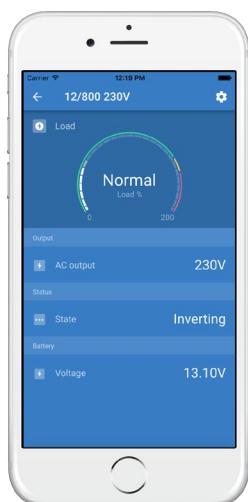

New models: more power per kg and per dm³, and better high temperature performance.
 Please consult our price list for availability: <https://www.victronenergy.com/information/pricelist>

VE.Direct communication port

The VE.Direct port can be connected to:

- A computer (VE.Direct to USB interface cable needed)
- Apple and Android smartphones, tablets, MacBook's and other devices (VE.Direct Bluetooth Smart dongle needed)

Fully configurable:

- Low battery voltage alarm trip and reset levels
- Low battery voltage cut-off and restart levels
- Dynamic cut-off: load dependent cut-off level
- Output voltage 100 - 120V
- Frequency 60 Hz (50Hz up to 100V)
- ECO mode on/off and ECO mode sense level

Monitoring:

- In- and output voltage, % load and alarms

Proven reliability

The full bridge plus toroidal transformer topology has proven its reliability over many years.
 The inverters are short circuit proof and protected against overheating, whether due to overload or high ambient temperature.

High start-up power

Needed to start loads such as power converters for LED lamps, halogen lamps or electric tools.

ECO mode

When in ECO mode, the inverter will switch to standby when the load decreases below a preset value (min load: 15W). Once in standby the inverter will switch on for a short period (adjustable, default: every 2,5 seconds). If the load exceeds a preset level, the inverter will remain on.

Remote on/off

A remote on/off switch can be connected to a two-pole connector, or between battery plus and the left-hand contact of the two-pole connector.

LED diagnosis

Please see manual for a description.

To transfer the load to another AC source: the automatic transfer switch

For our low power inverters, we recommend our Filax Automatic Transfer Switch. The Filax features a very short switchover time (less than 20 milliseconds) so that computers and other electronic equipment will continue to operate without disruption.

DC connection with screw terminals

No special tools needed for installation

With Nema 5-15R or GFCI socket



Nema 5-15R



GFCI

Inverter VE-Direct 120V/60Hz	12/250 24/250 48/250	12/375 24/375 48/375	12/500 24/500 48/500	12/800 24/800 48/800	12/1200 24/1200 48/1200	12/1600 24/1600 48/1600
Article number Nema 5-15R	PINxx1250500	PINxx1370500	PINxx1500500	PINxx1800520	PINxx2122520	PINxx2161500
Article number GFCI	PINxx1250510	PINxx1370510	PINxx1500510	PINxx1800530	PINxx2122530	PINxx2161510
Cont. power at 77 °F (25 °C)	250 W	375 W	460 W	800 W	1200 W	1500 W
Cont. power at 104 °F (40 °C)	200 W	300 W	380 W	650 W	1100 W	1350 W
Time-limited power (cold start)	300 W/15s	450 W/10s	500 W/1h	900 W/1h	1300 W/1h	1700 W/1h
Peak power	400 W/2s	600 W/2s	750 W/3s	1200 W/15s	1600 W/15s	2100 W/15s
Output AC voltage (adjustable) / frequency	120 VAC +/- 3% 60Hz +/- 0,1%					
Input voltage range	9,2 - 17 / 18,4 - 34 / 36,8 – 62 V					
DC low shut down (adjustable)	9,3 / 18,6 / 37,2 V					
Dynamic (load dependent) DC low shut down (fully configurable)	Dynamic cut-off, see https://www.victronenergy.com/live/ve.direct:phoenix-inverters-dynamic-cutoff					
DC low restart and alarm (adjustable)	10,9 / 21,8 / 43,6 V					
Battery charged detect (adjustable)	14 / 28 / 56 V					
Max. efficiency	84 / 86 / 86 %	86 / 88 / 88 %	86 / 88 / 88 %	90 / 90 / 91 %	91 / 91 / 92 %	91 / 91 / 92 %
Zero-load power	5 / 6 / 8 W	6 / 7 / 9 W	7 / 8 / 10 W	8 / 8 / 9 W	11 / 11 / 12 W	14 / 14 / 15 W
Default zero-load power in ECO mode (default retry interval: 2,5 s, adjustable)	1 / 1 / 2 W	1 / 1 / 2 W	1 / 1 / 2 W	1 / 2 / 2 W	1 / 2 / 3 W	1 / 2 / 3 W
ECO mode stop and start power setting	Adjustable					
Protection ⁽¹⁾	a - g					
Operating temperature range	-40 °F to 149 °F (-40 to +65 °C) (fan assisted cooling) Derate 1,25% per °F above -40 °F (40 °C)					
Humidity (non-condensing)	max 95%					
ENCLOSURE						
Material & Colour	Steel chassis and plastic cover (blue Ral 5012)					
Battery-connection	Screw terminals					
Maximum cable cross-section	10 mm ² 8 AWG	10 mm ² 8 AWG	10 mm ² 8 AWG	25/16/16 mm ² 4/6/6 AWG	35/25/25 mm ² 2/4/4 AWG	50/25/25 mm ² 1/4/4 AWG
Standard AC outlets	Nema 5-15R, GFCI					
Protection category	IP 21					
Weight (kg/lbs)	2,7 / 6	3 / 6,6	3,5 / 7,7	5,1 / 11	7 / 15	8 / 18
Dimensions (h x w x d, mm)	86 x 165 x 260 86 x 165 x 260 86 x 165 x 260	86 x 165 x 260 86 x 165 x 260 86 x 165 x 260	86 x 172 x 275 86 x 172 x 275 86 x 172 x 275	95 x 231 x 334 105 x 216 x 310 105 x 216 x 310	117 x 231 x 374 117 x 231 x 333 117 x 231 x 333	117 x 231 x 395 117 x 231 x 365 117 x 231 x 365
(h x w x d, inch)	3,4 x 6,5 x 10,2 3,4 x 6,5 x 10,2 3,4 x 6,5 x 10,2	3,4 x 6,5 x 10,2 3,4 x 6,5 x 10,2 3,4 x 6,5 x 10,2	3,4 x 6,8 x 10,8 3,4 x 6,8 x 10,8 3,4 x 6,8 x 10,8	3,7 x 9,1 x 13,0 4,1 x 8,5 x 12,2 4,1 x 8,5 x 12,2	4,6 x 9,1 x 14,7 4,6 x 9,1 x 13,1 4,6 x 9,1 x 13,1	4,6 x 9,1 x 15,6 4,6 x 9,1 x 14,4 4,6 x 9,1 x 14,4
ACCESSORIES						
Remote on-off	Yes					
Automatic transfer switch	Filax					
STANDARDS						
Safety	EN-IEC 60335-1 / EN-IEC 62109-1					
EMC	EN 55014-1 / EN 55014-2 / IEC 61000-6-1 / IEC 61000-6-2 / IEC 61000-6-3					
1) Protection key: a) output short circuit b) overload c) battery voltage too high d) battery voltage too low e) temperature too high f) DC ripple too high						



Battery Alarm

An excessively high or low battery voltage is indicated by an audible and visual alarm, and a relay for remote signalling.



VE.Direct Bluetooth Smart dongle



BMV Battery Monitor

The BMV Battery Monitor features an advanced microprocessor control system combined with high resolution measuring systems for battery voltage and charge/discharge current. Besides this, the software includes complex calculation algorithms to exactly determine the state of charge of the battery. The BMV selectively displays battery voltage, current, consumed Ah or time to go. The monitor also stores a host of data regarding performance and use of the battery.