


Inverters VE-Direct – new models

250W – 1600W 230V


www.victronenergy.com



Inverter 12/375 VE.Direct

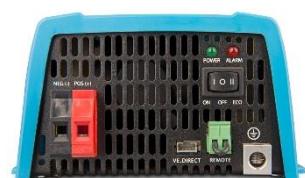

Inverter 12/375 VE.Direct

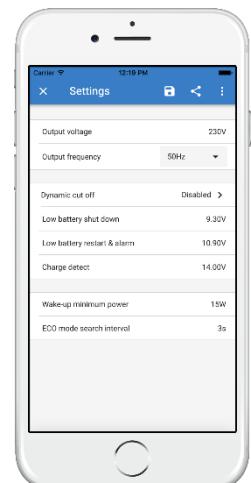

New models: more power per kg and per dm³, and better high temperature performance.
Please consult our price list for availability: <https://www.victronenergy.com/information/pricelist>

VE.Direct communication port

The VE.Direct port can be connected to:

- A computer (VE.Direct to USB interface cable needed)
- Apple and Android smartphones, tablets, MacBook's and other devices (VE.Direct Bluetooth Smart dongle needed)

Fully configurable:

- Low battery voltage alarm trip and reset levels
- Low battery voltage cut-off and restart levels
- Dynamic cut-off: load dependent cut-off level
- Output voltage 210 - 230V
- Frequency 50 Hz or 60 Hz
- ECO mode on/off and ECO mode sense level

Monitoring:

- In- and output voltage, % load and alarms

Proven reliability

The full bridge plus toroidal transformer topology has proven its reliability over many years.

The inverters are short circuit proof and protected against overheating, whether due to overload or high ambient temperature.

High start-up power

Needed to start loads such as power converters for LED lamps, halogen lamps or electric tools.

ECO mode

When in ECO mode, the inverter will switch to standby when the load decreases below a preset value (min load: 15W). Once in standby the inverter will switch on for a short period (adjustable, default: every 2,5 seconds). If the load exceeds a preset level, the inverter will remain on.

Remote on/off

A remote on/off switch can be connected to a two-pole connector, or between battery plus and the left-hand contact of the two-pole connector.

LED diagnosis

Please see manual for a description.

To transfer the load to another AC source: the automatic transfer switch


For our low power inverters, we recommend our Filax Automatic Transfer Switch. The Filax features a very short switchover time (less than 20 milliseconds) so that computers and other electronic equipment will continue to operate without disruption.

DC connection with screw terminals


No special tools needed for installation

Available with different output sockets


Schuko



UK



AU/NZS



IEC-320

(male plug included)



| Inverter VE-Direct 230V/50Hz | 12/250 24/250 48/250 | 12/375 24/375 48/375 | 12/500 24/500 48/500 | 12/800 24/800 48/800 | 12/1200 24/1200 48/1200 | 12/1600 24/1600 48/1600 |
|---|--|--|--|--|---|---|
| Article number (1) | PINxx1251X10 | PINxx1371X10 | PINxx1501X10 | PINxx1801X10 | PINxx2121X10 | PINxx2161X00 |
| Cont. power at 25°C | 250W | 375W | 450W | 800W | 1150W | 1450W |
| Cont. power at 40°C | 200W | 300W | 380W | 650W | 1000W | 1300W |
| Time-limited power (cold start) | 300W/15s | 450W/10s | 500W/1h | 900W/1h | 1200W/1h | 1600W/1h |
| Peak power | 400W/2s | 600W/2s | 750W/3s | 1200W/15s | 1600W/15s | 2100W/15s |
| Output AC voltage / frequency (adjustable) | 230VAC +/- 3% 50Hz or 60Hz +/- 0,1% | | | | | |
| Input voltage range | 9,2 - 17 / 18,4 - 34 / 36,8 - 62 V | | | | | |
| DC low shut down (adjustable) | 9,3 / 18,6 / 37,2V | | | | | |
| Dynamic (load dependent) DC low shut down (fully configurable) | Dynamic cut-off, see https://www.victronenergy.com/live/ve.direct:phoenix-inverters-dynamic-cutoff | | | | | |
| DC low restart and alarm (adjustable) | 10,9 / 21,8 / 43,6V | | | | | |
| Battery charged detect (adjustable) | 14 / 28 / 56V | | | | | |
| Max. efficiency | 84 / 86 / 86 % | 86 / 88 / 88 % | 86 / 88 / 88 % | 90 / 90 / 91 % | 91 / 91 / 92% | 91 / 91 / 92% |
| Zero-load power | 5 / 6 / 8 W | 6 / 7 / 9 W | 7 / 8 / 10 W | 8 / 8 / 9 W | 10 / 11 / 12 W | 14 / 14 / 15 W |
| Default zero-load power in ECO mode (default retry interval: 2,5 s, adjustable) | 1 / 1 / 2 W | 1 / 1 / 2 W | 1 / 1 / 2 W | 1 / 2 / 2 W | 1 / 2 / 3 W | 1 / 2 / 3 W |
| ECO mode stop and start power setting | Adjustable | | | | | |
| Protection (2) | a - g | | | | | |
| Operating temperature range | -40 to +65°C (fan assisted cooling) Derate 1,25% per °C above 40°C | | | | | |
| Humidity (non-condensing) | max 95% | | | | | |
| ENCLOSURE | | | | | | |
| Material & Colour | Steel chassis and plastic cover (blue Ral 5012) | | | | | |
| Battery-connection | Screw terminals | | | | | |
| Maximum cable cross-section | 10 mm ² | 10 mm ² | 10 mm ² | 25/16/16 mm ² | 35/25/25 mm ² | 50/25/25 mm ² |
| Standard AC outlets | 230V: Schuko (CEE 7/4), IEC-320 (male plug included) UK (BS 1363), AU/NZ (AS/NZS 3112) | | | | | |
| Protection category | IP 21 | | | | | |
| Weight (kg) | 2,7 | 3 | 3,5 | 5,5 | 7,2 | 8,9 |
| Dimensions (h x w x d, mm) | 86 x 165 x 260 86 x 165 x 260 86 x 165 x 260 | 86 x 165 x 260 86 x 165 x 260 86 x 165 x 260 | 86 x 172 x 275 86 x 172 x 275 86 x 172 x 275 | 95 x 231 x 334 105 x 216 x 310 105 x 216 x 310 | 117 x 231 x 374 117 x 231 x 333 117 x 231 x 333 | 117 x 231 x 395 117 x 231 x 365 117 x 231 x 365 |
| ACCESSORIES | | | | | | |
| Remote on-off | Yes | | | | | |
| Automatic transfer switch | Filax | | | | | |
| STANDARDS | | | | | | |
| Safety | EN-IEC 60335-1 / EN-IEC 62109-1 | | | | | |
| EMC | EN 55014-1 / EN 55014-2 / IEC 61000-6-1 / IEC 61000-6-2 / IEC 61000-6-3 | | | | | |
| Automotive Directive | ECE R10-4 pending | | | | | |
| 1) Output socket: X=1: IEC X=2: Schuko X=3: AU/NZ X=4: UK | 2) Protection key: a) output short circuit b) overload c) battery voltage too high d) battery voltage too low e) temperature too high f) DC ripple too high | | | | | |



Battery Alarm

An excessively high or low battery voltage is indicated by an audible and visual alarm, and a relay for remote signalling.



BMV Battery Monitor

The BMV Battery Monitor features an advanced microprocessor control system combined with high resolution measuring systems for battery voltage and charge/discharge current. Besides this, the software includes complex calculation algorithms to exactly determine the state of charge of the battery. The BMV selectively displays battery voltage, current, consumed Ah or time to go. The monitor also stores a host of data regarding performance and use of the battery.



VE.Direct Bluetooth Smart dongle