


MyPv Ac-Thor and Victron Energy Off-Grid

For an Off-Grid system. when the batteries are full and we still have PV power available, that power is lost. We could use that power and send it to a boiler or something similar. For this we are using a device from My PV called AC-Thor.

The schematic for this kind of system looks like this (the meter from MyPv is not needed in this setup):

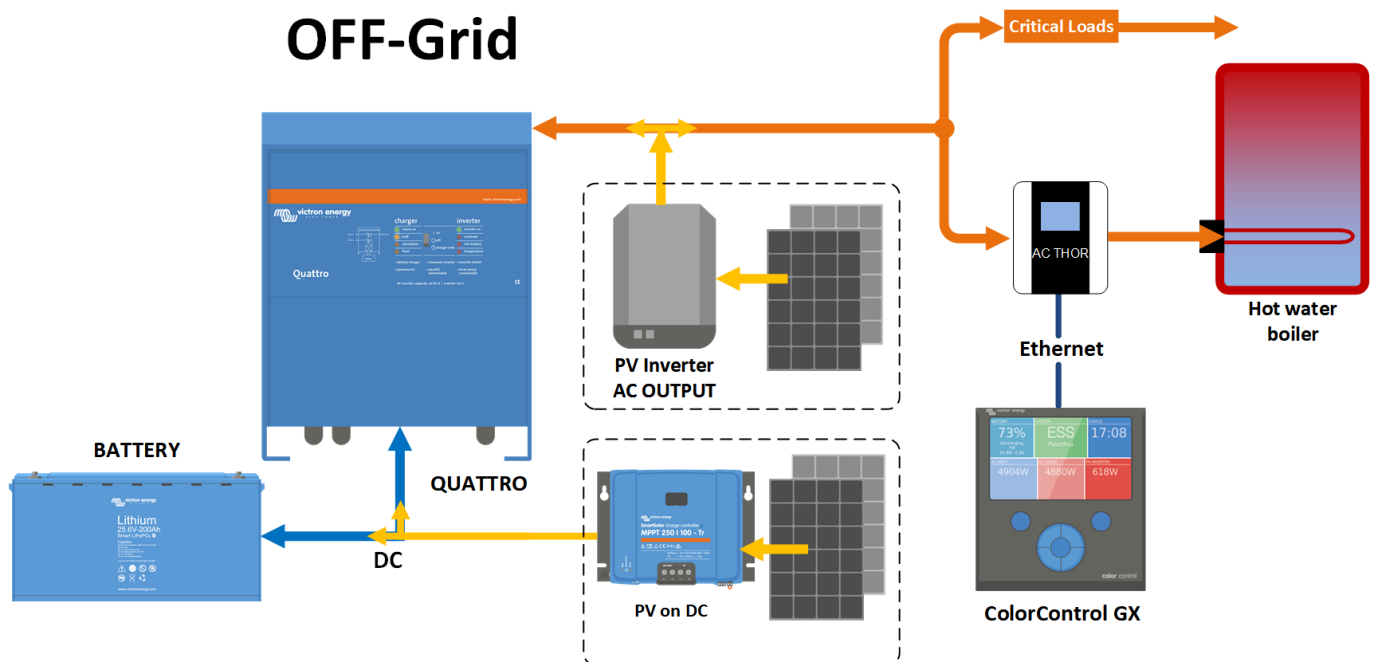

First setup:


Ac-Thor device must be connected on the AC output of the Multi/Quattro.

Using the device touch screen, select Information menu and go to the third screen to find the current IP address.



Open a browser, put that IP address into the address field and press enter

The webpage should look like this:

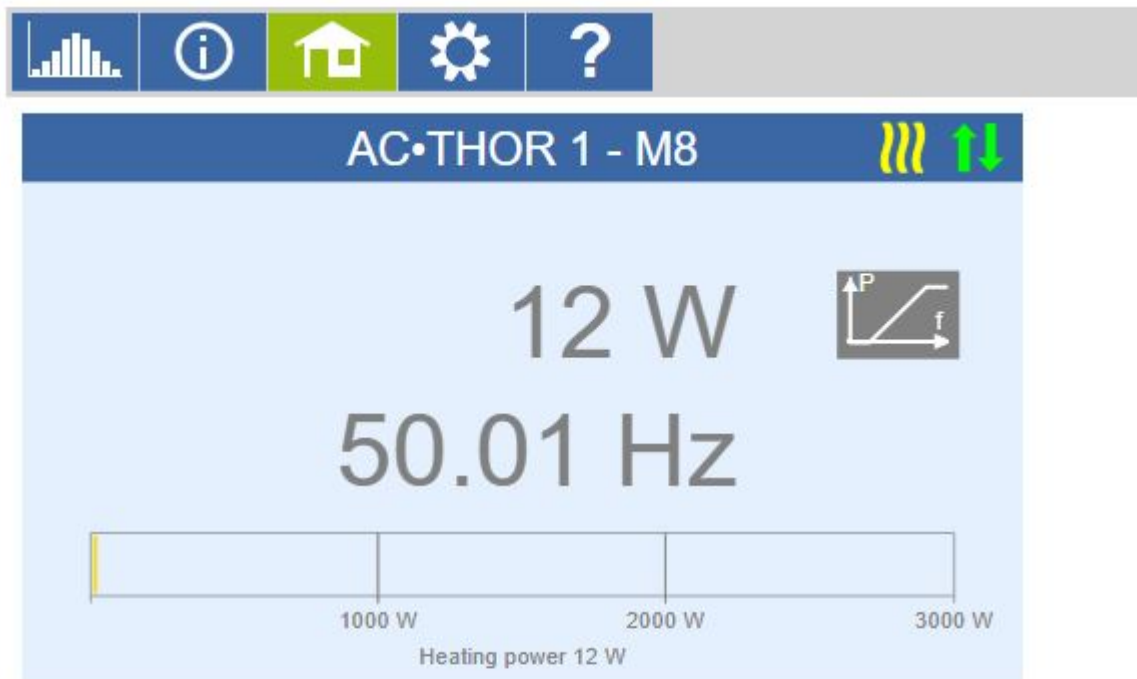

Device state

- ☐ Off
☒ On

Firmware Version: a0010006

Internet connection required for help.

© 2018 my-PV GmbH, Austria. All Rights reserved. www.my-pv.com

Please check the firmware version on AC-Thor device, must be at least a0010006. Go to setting and select the "Mode". For ESS select "Hot water 3KW", for off-grid systems, select "Frequency-Mode".

Go to Frequency-Modus and define Frequency start value 50.1Hz and the Frequency end value 51Hz.

Frequency-Modus

Frequency start	Frequency end
50.1 Hz	51 Hz
<input type="button" value="Save"/>	

On the Multiplus or Quattro, using Ve.config, add the PV Inverter support Assinstant

From:

<https://www.victronenergy.com/live/> - **Victron Energy**

Permanent link:

https://www.victronenergy.com/live/actor_offgrid?rev=1560240274

Last update: **2019-06-11 10:04**

