

# DRAFT: Victron & Exide

The combination of Victron products with the Exide battery has been tested and certified by the R&D departments. The combination is actively supported by both companies.

Compatible models:

- LIBM0480050-G01 as of firmware v1.10

## 1. Introduction

### 1.1 Compatible Victron products

All 48V Multis and Quattros. And always a [GX device](#) is necessary in the system, since that has the canbus port which is used for the (required!) communication between the ESS battery and the Victron system.

### 1.2 Notes

### 1.3 System diagram

## 2. GX device needed

To use the Exide ESS in Victron system, it is necessary to use a Color Control GX or Venus GX. On first commissioning an external power supply (Not the 48V from the Exide-Battery) is needed. The GX device sends a keep alive signal to the Exide ESS via canbus. This will only be send once the canbus baud rate is changed (see 5. [GX device Configuration](#)). Without it, the battery will have a communication fault and shut down after 10sec.

## 3. Wiring of communication cables

Use the *VE.Can to CAN-bus BMS type B Cable*, part number ASS030720018. Plug the side which is labeled Battery BMS into the Exide BMS. Plug the side labeled Victron VE.Can into the [GX device](#).

Then, plug a [VE.Can terminator](#) in the other VE.Can socket on the [GX device](#). Two VE.Can terminators are included with the package of the GX device as an accessory, only one is used. Keep the other one as a spare.


More information about the cable can be found in [its manual](#).

Without properly connecting this cable, the battery will stop charging/discharging after several minutes. Also, the battery will not show up on the display of the [GX device](#).


## 4. VEConfigure settings

## 5. GX device Configuration

- Select the *CAN-bus BMS (500 kbits/s)* CAN-profile in the **GX device**. Menu path: *Settings* → *Services* → *CAN-profile*. Note that this changes the function of a VE.Can port: it is not possible to connect both VE.Can products and an Exide battery together on a Color Control GX. It is possible on the Venus GX.
- After properly wiring and setting up, the Exide ESS will be visible as a battery in the device list:

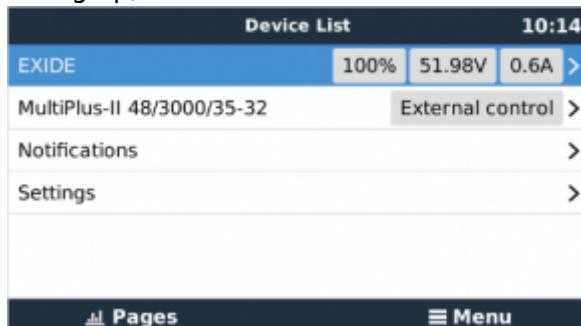

- The parameters option within the battery page shows the actual battery charge and discharge limits:

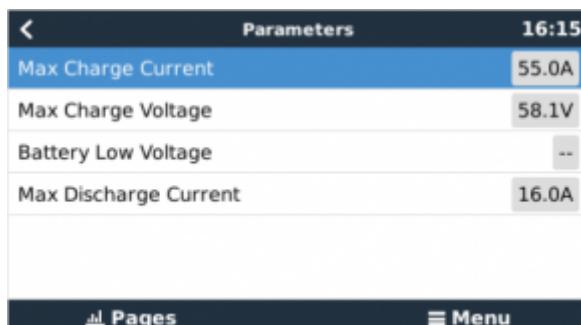

From:  
<https://www.victronenergy.com/live/> - **Victron Energy**

Permanent link:

[https://www.victronenergy.com/live/battery\\_compatibility:exide?rev=1658139210](https://www.victronenergy.com/live/battery_compatibility:exide?rev=1658139210)

Last update: **2022-07-18 12:13**

