

Raymarine MFD Integration

1. Introduction

This document explains how to connect to Raymarine MFDs using an Ethernet connection. The integration technology used is called [LightHouse Apps](#) by Raymarine.

Make sure to also study the [Marine MFD Integration by App chapter in the manual](#).

Note that there is an alternative method to connect, which is NMEA2000. See the [NMEA2000 chapter in the main manual](#).

2. Compatibility

The MFD integration is compatible with the Axiom, Axiom Pro and Axiom XL MFDs running on LightHouse 3. The eS & gS Series multifunction displays which have been upgraded to LightHouse 3 are **not** compatible.

Raymarine MFDs need at least LightHouse v3.11 for compatibility, which was released in November 2019.

3. Wiring

The MFD needs to be connected to the [GX device](#) using ethernet. It is **not** possible to connect over Wi-Fi. For the ethernet connection, a RayNet adapter is required.

The RayNet adapters can be purchased from Raymarine:


- A62360 - RayNet (F) to RJ45 (M) - 1m
- A80151 - RayNet (F) to RJ45 (M) - 3m
- A80159 - RayNet (F) to RJ45 (M) - 10m
- A80247 - RayNet (F) to RJ45 (F) Adapter
- A80513 - RayNet male to RJ45 adaptor cable

Connecting a Axiom MFD to a network router lead ls to IP address conflicts, due to the integrated DHCP server.

To connect the [GX device](#) to the internet as well, use WiFi


4. Configuration

On the Victron GX Device, go to *Settings* → *Services*, and there enable both *MQTT on LAN (SSL)* and

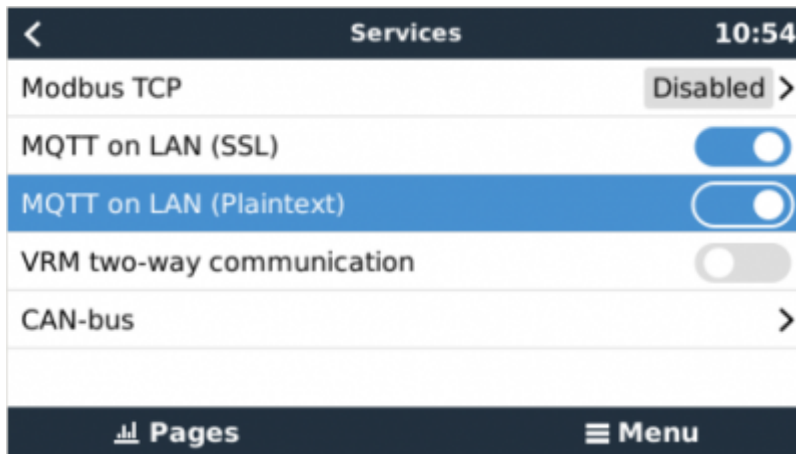

MQTT on LAN (Plaintext).

Next, go to *Settings* → *System Setup* → *Scroll to the bottom* → *Marine MFD App configuration*. And there set up what batteries you want to see on the MFD; and by what name.

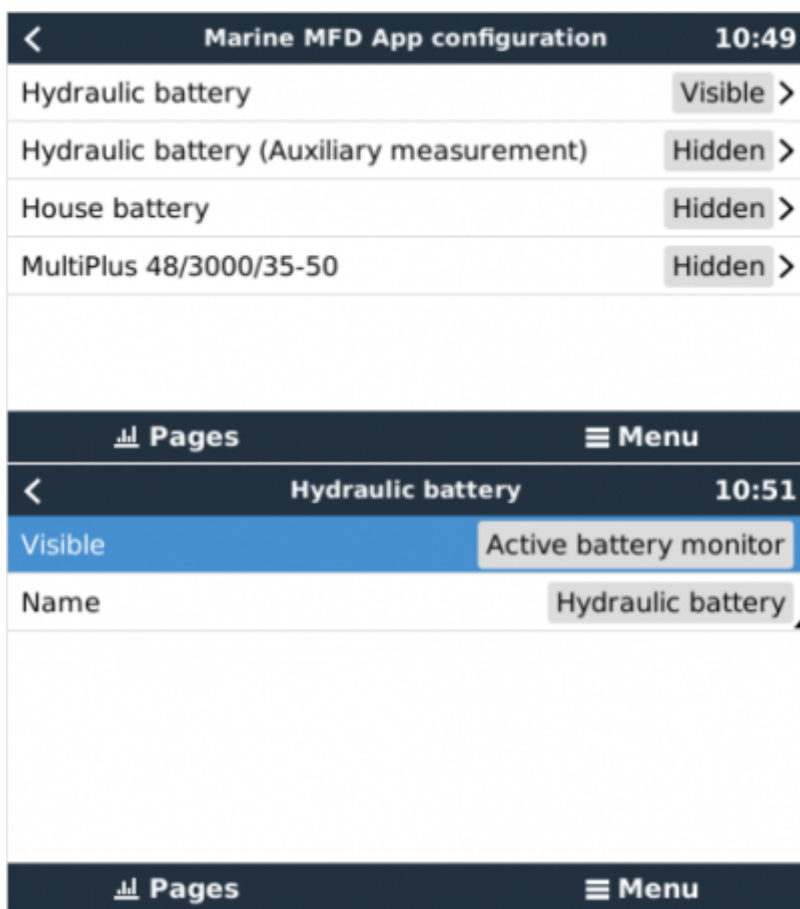

No other settings, such as IP addresses or similar are required, since the Axiom MFDs have an integrated DHCP server.

5. Configuring Multiple Battery Measurements

This video explains how to setup multiple battery measurements, and naming them.




Video


6. Step by Step





Step 2: Connect RJ45 into Victron Venus GX, Color Control GX or Octo GX.  **victron energy**
BLUE POWER



Then go to Apps and select the Victron  **victron energy**
BLUE POWER




Then go to Apps and select the Victron logo.



And... you're done!



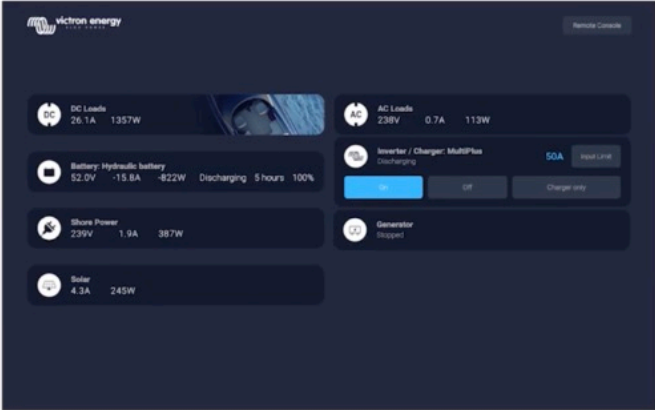

DC Loads →

Battery information →

Shore Power →

Solar →

← AC Loads

← Inverter Control

← Generator

Category	Value 1	Value 2
DC Loads	26.1A	1357W
Battery (Hydraulic battery)	52.0V	-15.6A -822W Discharging 5 hours 100%
Shore Power	239V	1.9A 387W
Solar	4.3A	245W
AC Loads	230V	0.7A 113W
Inverter / Charger (MultiPlus)	50A	Charging only
Generator	Stopped	

All information can now be viewed on one screen.



Video

From: <https://www.victronenergy.com/live/> - **Victron Energy**

Permanent link: <https://www.victronenergy.com/live/venus-os:mfd-raymarine?rev=1591889426>

Last update: **2020-06-11 17:30**

