

# CCGX

## CCGX Hardware and software introduction

### Hardware

The CCGX is based on the Technexion board TAM-3517, which is using the Texas Instruments Sitara AM3517, containing a ARM Cortex-A8 microprocessor:



### Software

#### Linux

CCGX image / distro is based on Poky.

Poky can be thought of as a reference distribution. It is maintained by an organisation called the Yocto Project and based on Open Embedded.

Taken directly from the Yocto Project website ([www.yoctoproject.org](http://www.yoctoproject.org)): "...The Yocto Project™ is an open source collaboration project that provides templates, tools and methods to help you create custom Linux-based systems for embedded products regardless of the hardware architecture". Some of their projects that are relevant to the CCGX are Poky and Bitbake.

Open Embedded is a build environment for embedded linux, and has all kinds of tools, mechanisms and recipes to build the Linux kernel and make a full embedded Linux rootfs. Maintained version are listed here, <https://wiki.yoctoproject.org/wiki/Releases>.

Angström, a well known linux distribution for embedded, is built using Open Embedded, and also related to Poky. Victron is not using Angström.

For more introduction, refer to the websites of Poky and Open Embedded. And this blog is also


interesting:

<http://blogs.mentor.com/chrishallinan/blog/2012/04/13/yocto-versus-poky-versus-angstrom-etc/>

To build the distro yourself, see: <https://github.com/victronenergy/venus>

## Victron software

we are using a mixture of C, C++, QML (for the user interface) and Python. As a main data exchange, to share values such as voltages, as well as settings and other data, we use D-Bus. D-bus is for inter process communication, see google and the [D-Bus page on wikipedia](#) for more information. This diagram gives a good overview of the whole thing:

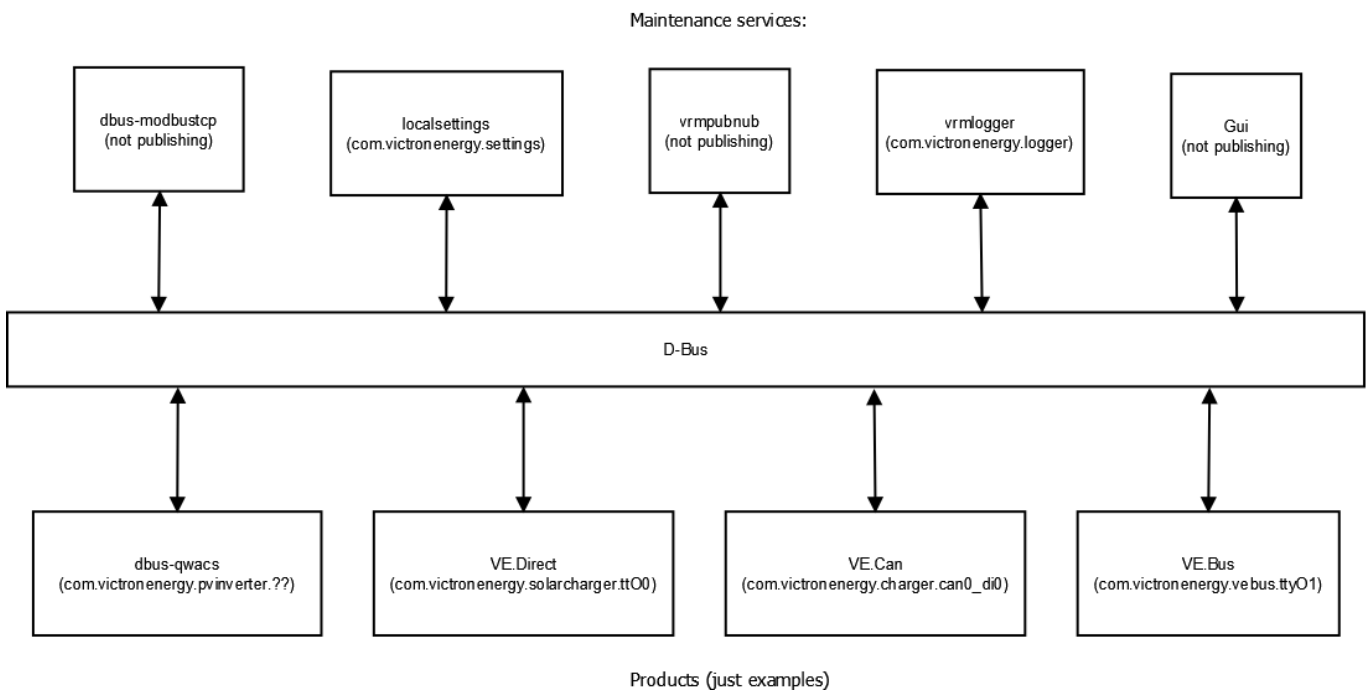

## Product processes

Processes that interface to products, using the different protocols. These processes make the information available on the D-Bus.

- VE.Can to dbus  
written in C, reads and writes to the VE.Can comm. port.
- mk2dbus  
written in C, reads and write to VE.Bus (Victron inverter/charger protocol).
- VE.Direct to D-Bus  
written in C, reads/writes to serial connected devices, such as the BMV and MPPT solar chargers.
- gps\_dbus  
also written in C. Open source: [https://github.com/victronenergy/dbus\\_gps](https://github.com/victronenergy/dbus_gps).
- dbus\_qwacs  
C++, using the QT library. Reads data from wireless AC sensors connected via an Ethernet-DECT gateway. Open source: [https://github.com/victronenergy/dbus\\_qwacs](https://github.com/victronenergy/dbus_qwacs)
- dbus-fronius

written in C++, communications to Fronius PV inverters via LAN/Ethernet. Open source:

<https://github.com/victronenergy/dbus-fronius>

- dbus-motordrive  
[https://bitbucket.org/oceanvolt/dbus\\_motordrive](https://bitbucket.org/oceanvolt/dbus_motordrive)

## Other processes

- gui  
Written in C++ and QML, uses QT. Takes care of the user interface: buttons and the display
- vrmlogger  
Written in Python, takes data from the dbus and submits it to the VRM Portal.  
<https://vrm.victronenergy.com/>
- localsettings  
Written in Python, takes care of user settings. All other processes read and write their settings through this daemon via D-Bus. The daemon is an interface between D-Bus and the file `/data/conf/settings.xml`. Open source: <https://github.com/victronenergy/localsettings>.
- dbus\_modbustcp  
Written in C++, uses QT. Modbustcp server that can be used to access data of all products connected to the CCGX. See our [Data communication whitepaper](#) for more information. Open source: [https://github.com/victronenergy/dbus\\_modbustcp](https://github.com/victronenergy/dbus_modbustcp)
- dbus-systemcalc-py  
Written in Python, publish PV totals and other system readings on D-Bus. The overviews on the CCGX get their information from this service (`com.victronenergy.system`). Open source: <https://github.com/victronenergy/dbus-systemcalc-py>

## Source code

As visible in above project list, part of the sources is already available. All that is open source is available on <https://github.com/victronenergy/>. The rest is still on Victrons internal git servers, and where possible slowly being moved to github.

## Plans currently being worked on

- Have a local version of <https://vrm.victronenergy.com> including database run on the CCGX itself, using php/hiawatha and sqlite.
- Secure VNC ([http://www.victronenergy.com/live/ccgx:ccgx\\_vnc](http://www.victronenergy.com/live/ccgx:ccgx_vnc)), and make it useable remotely when the CCGX is behind a firewall.

## Future plans

Functionality wise, the plans are (in random order):

- Make support for more types of sensors (temp sensors etc)
- Be able to use BMV's to read current from for example a dc wind generator, and show on overview and VRM portal
- Make more of the project open source
- Further mature alarms, and add SMS and email notifications

- Make it usable as a UPS-replacement. local website, emailalerts, battery minutes remaining, etc.
- Add SNMP (UPS-MIB)

## Other tips

- to make a screenshot, first press and hold the down button, and then press the up button. The screenshot will be saved to /opt/color-control/gui/. It will overwrite the previous one.

And see [color\\_control\\_gx](#) for more CCGX development information

## DISQUS

~~DISQUS~~

From:  
<https://www.victronenergy.com/live/> - **Victron Energy**

Permanent link:  
[https://www.victronenergy.com/live/open\\_source:ccgx:start?rev=1434398991](https://www.victronenergy.com/live/open_source:ccgx:start?rev=1434398991)

Last update: **2015-06-15 22:09**

